

Water Treatment



ATHENA BX

ELECTROMAGNETIC DOSING PUMPS



Main characteristics

- PVDF PUMP HEAD suitable for chemical used in the Industrial, Waste Water Treatment and Potable Water applications
- CERAMIC BALL full chemical compatibility
- PTFE DIAPHRAGM unique life expectancy and compatibility with most chemicals
- STEADY DOSING Stabilized Multi Power Supply 100÷240 Vac 50/60 Hz with reduced consumption
- QUICK CONNECTIONS
- MANUAL PRIMING VALVE
- IP65 PROTECTION
- Adjustable flow rate by a knob on the front panel.
- POWER-ON and LEVEL ALARMS LED
- 0÷20%, 0÷100% double manual flow regulation
- Anti-seepage system

DosingPump.it

Water Treatment

Athena – Performance data

PERFORMANCES TEST HAS BEEN DONE AT AMBIENT TEMPERATURE, WITH WATER, AT 1,5 mt SUCTION HEIGHT

FLOW RATES	PRESURES	CC/IMP.	CONNECTIONS	STROKES/MIN.	CONSUMPTION	WEIGHT	MODEL
------------	----------	---------	-------------	--------------	-------------	--------	-------

2,5 l/h	20 bar	0,35	4x6 – 4x7	120	14 watt	3kg	Athena 1
3 l/h	18 bar	0,42	4x6 – 4x7	120	14 watt	3 kg	
4,2 l/h	14 bar	0,58	4x6 – 4x7	120	14 watt	3 kg	
7 l/h	8 bar	0,97	4x6 – 4x7	120	14 watt	3 kg	

3 l/h	12 bar	0,31	4x6	160	20 watt	3 kg	Athena 2 
4 l/h	10 bar	0,42	4x6	160	20 watt	3 kg	
8 l/h	8 bar	0,52	4x6	160	20 watt	3 kg	
8 l/h	2 bar	0,83	4x6	160	20 watt	3 kg	



7 l/h	16 bar	0,39	4x6	300	40 watt	4 kg	Athena 3
10 l/h	10 bar	0,56	4x6	300	40 watt	4 kg	
15 l/h	5 bar	0,83	4x6	300	40 watt	4 kg	
18 l/h	1 bar	1,00	4x6	300	40 watt	4 kg	

20 l/h	5 bar	1,11	8x12	300	40 watt	4 kg	Athena 4
32 l/h	4 bar	1,78	8x12	300	40 watt	4 kg	
62 l/h	2 bar	3,44	8x12	300	40 watt	4 kg	
110 l/h	0,1 bar	6,11	8x12	300	40 watt	4 kg	

DosingPump.it

 **INJECTA**
the perfect dosing

Water Treatment

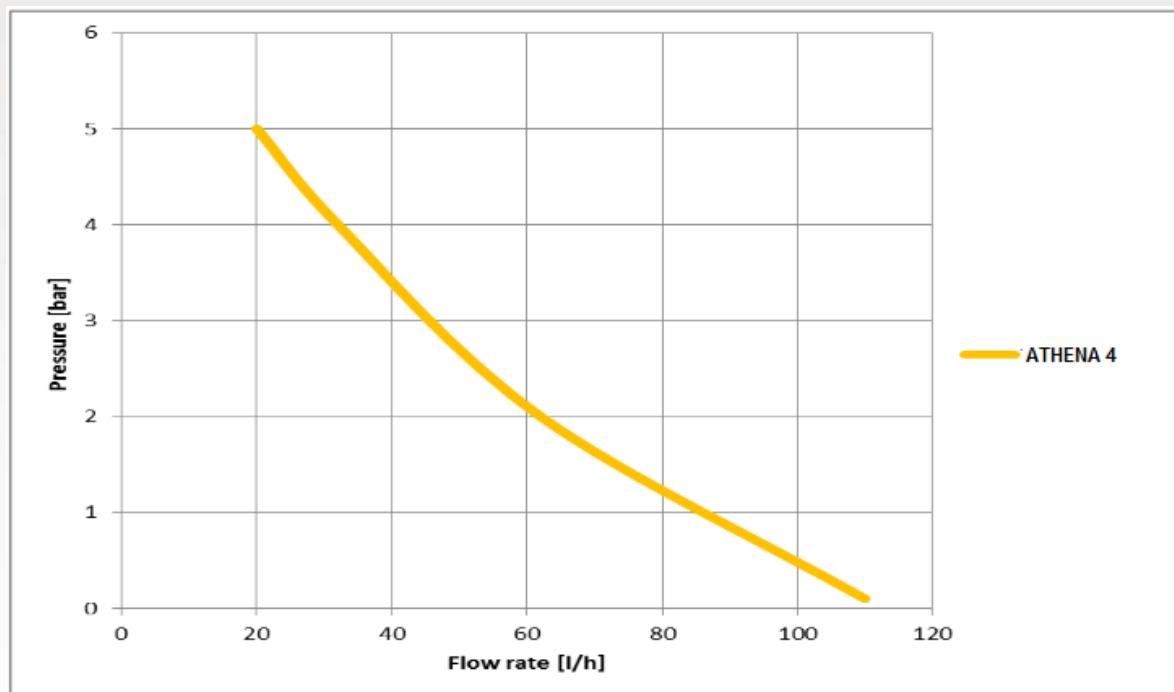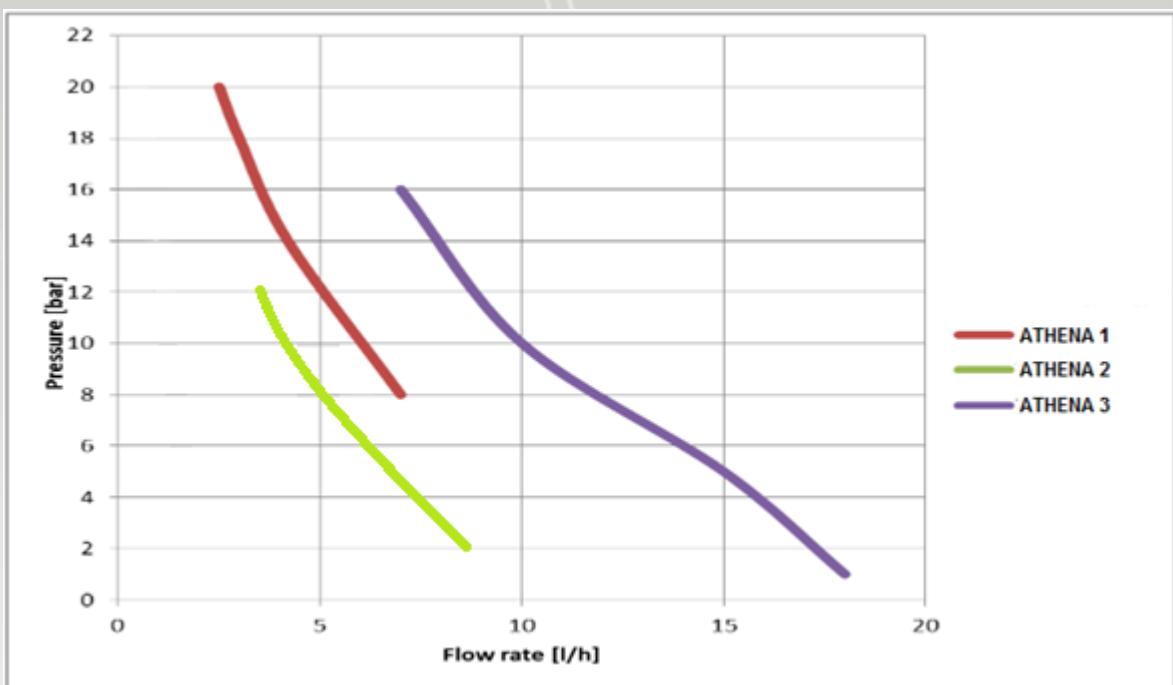

DosingPump.it


Water Treatment



Anti-seepage system

The anti-seepage system, is a solution to prevent the intrusion of chemical product inside the pump: leakage and chemical intrusion can happen when the O-ring is damaged or consumed by regular use.

This device is integrated in the hydraulic part, between pump head and body, behind the diaphragm: the outgoing collection channel of the anti-seepage device (see below blue arrow) collects the leakage and expel it out. When the leakage is visible, the operator can proceed either tightening the 4 bolts of the head (4Nm torque) or disassembling the head and inspect it in order to understand leakage causes .

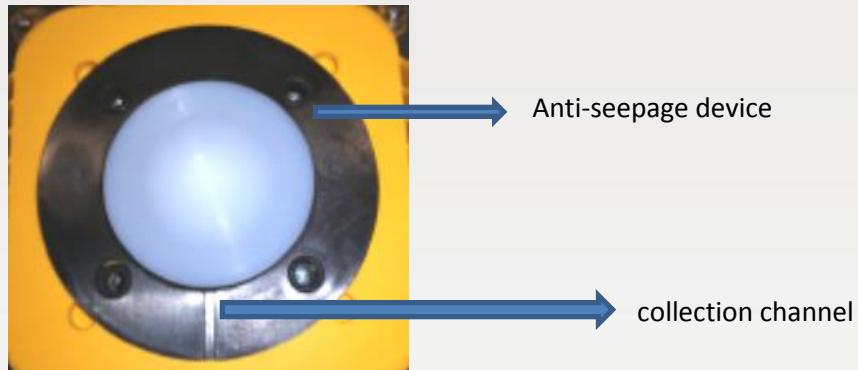

DosingPump.it

Water Treatment



Main application

- Electroplating industry, Pickling, Degreasing and metal treatments generally
- Cooling Tower
- Potable water application
- Reverse osmosis application
- Paper industry
- Ceramic industry

Example of installation



DosingPump.it

Water Treatment



Installation kit



Accessories

AC.VSA (ATHENA.1 .2 .3)	
	<ul style="list-style-type: none">Pvdf Pump head with automatic bleed valveFlow reduction, according to the quantity of air in the liquid

AC.VM PVDF	
	<ul style="list-style-type: none">Multifunction valve, anti-syphon, backpressure, safetyPVDF body, PTFE membraneAdjustable Pressure 0-5 barRelief Pressure 0-18 bar

AC.SF	
	<ul style="list-style-type: none">PVC Flow sensorFPM Seals4x6 / 8x12 connections

AC.VS	
	<ul style="list-style-type: none">Back-pressure valve up to 10 barPTFE diaphragm

AC.ST	
	<ul style="list-style-type: none">Horizontal base mounting bracket

PRIMING AID	
	<ul style="list-style-type: none">Capacity: 300 mlPVC bodyFPM sealsConnections: 4x6mm – 8x12mm

AC.VIE	
	<ul style="list-style-type: none">Extractable injection valve PVC 1/2" g.m. IN - 1/2" g.m. OUT
	<ul style="list-style-type: none">Extractable injection valve with ball valve PVC 1/2" g.m. IN - 1/2" g.m. OUT


DosingPump.it

Water Treatment





Dimensional drawings

Plumbing

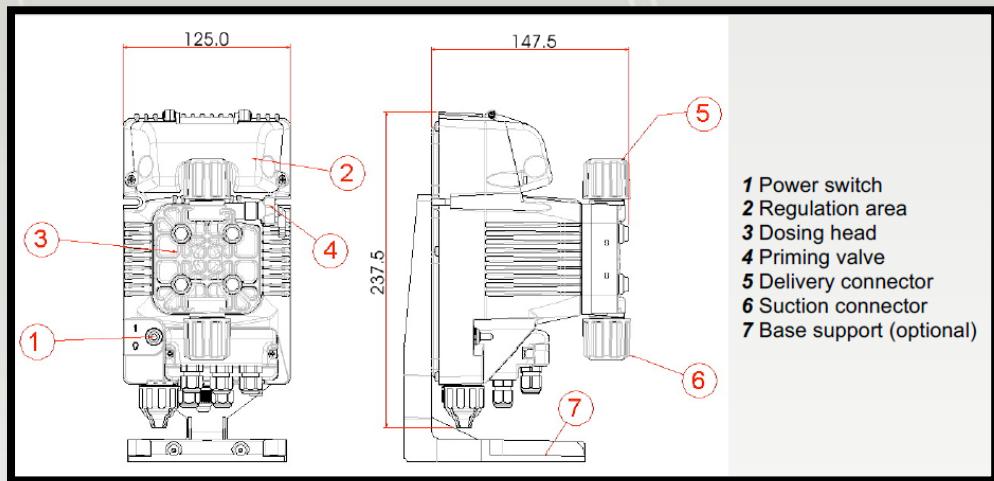

Fixing templates

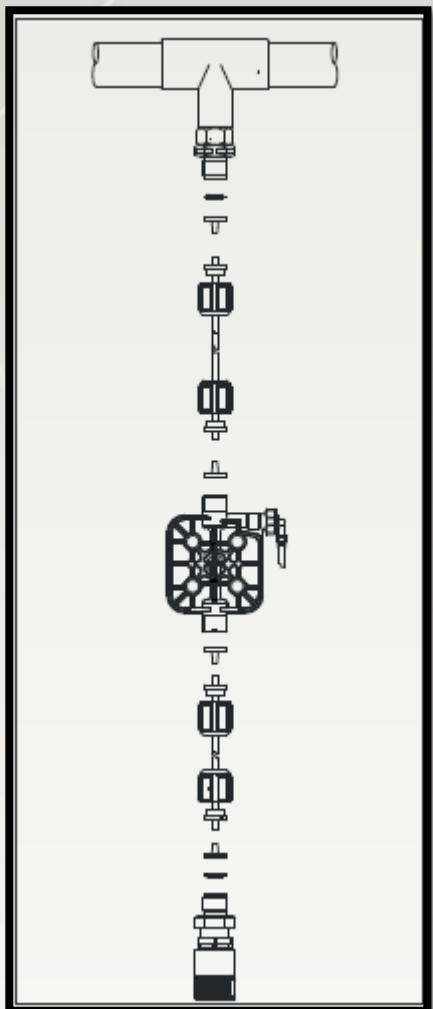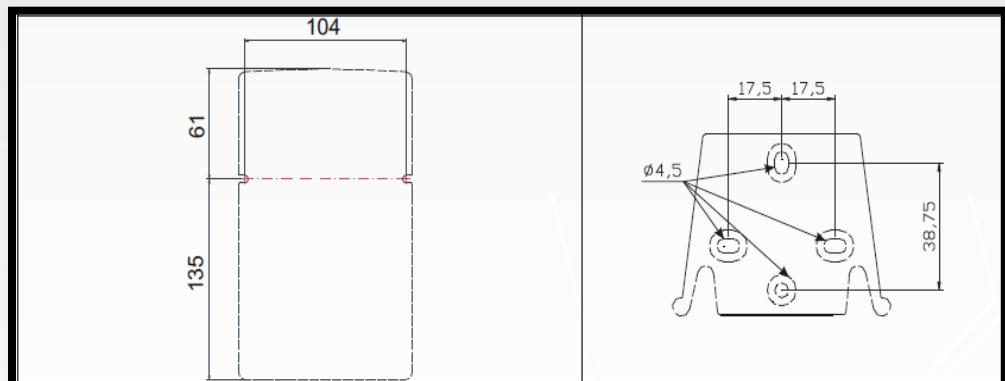

DosingPump.it